




Earthing – Overhead lines



3-Phase Earthing Device JSKL3-STG
Low- and high voltage 0,4 – 52 kV
max 16,0 kA/1s

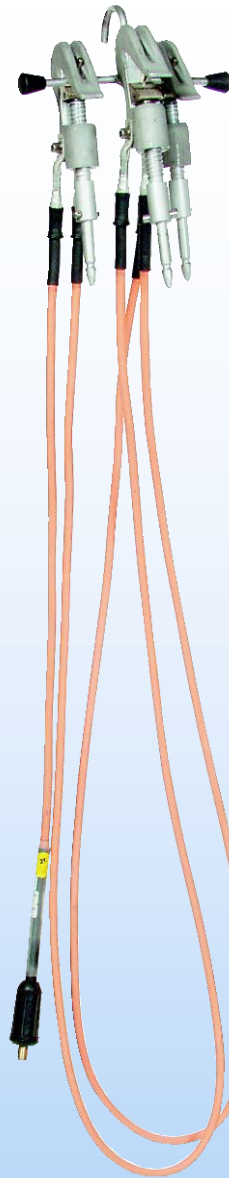

3-Phase Earthing Device JSKL3-STG
Line length: 1,0+2,5+2,5 m



The clamp can be fitted in inclined angle to the line!



Operating Pole MRS 24
Rated current 24 kV
Length: 1,6 m



1-Phase Earthing Device JSKL1-JTG
Recommended as down line to ground
When working without "0" line
Line length: 15 m
Pole length: 0,3 m

RAGNAR STÅLSKOG AB

Box 701, SE-194 27 Upplands Väsby, Sweden. Visitors address: Instrumentvägen 6
Tel: +46 8 594 211 80 Fax: +46 8 590 882 91 www.stalskog.se rs@stalskog.se

Earthing – Overhead lines

Earthing Device JSKL3-STG for overhead lines

In conformity with EN 61230, EN 61235 och EN 61243-1

Operating Voltage 0,4 - 52 kV. Earthing Device with clamp **JSKL** is specially designed to a quick and easy application to overhead lines (diameter 1 - 25 mm). The clamp can be fitted in inclined angle to the line, which will extremely facilitate the application.

The Line Clamp JSKL-STG is equipped with buttress thread, which makes the tightening with only few turns.



1-Phase Earthing Device
JSKL1-STG
Line length: 1,5 m



1-Phase Earthing Device
JK238-DXF
Suitable as down line to earth when there is no "0" conductor.
The device is for connection to framework up to 30mm thick.



Rod Screw
DJS 1
For temporary grounding



Voltage Detector
TAG 2020 F2
with **TAG/JGS** fitting
3,6-7,2 + 12-36 kV



Operating Pole 52 kV
MRS 52
Total length 2,0 m



Operating Pole 24 kV
MRS-T 24
(telescopic)
Transportation length 1,2 m
Total length 1,7m / 2,1 m



Case
DFO/JSKL1-J



Case
DFO 117

No.	Type	Description	Cable area mm ²	Rated current kA/1s	Weight kg
*	JSKL3-STG	3-Phase Earthing Device	25 – 70	5,7 – 16,0	5,9 – 8,7 (incl. cable)
*	JSKL1-JTG	1-Phase Earthing Device	25 – 70	5,7 – 16,0	5,0 – 11,9 (incl. cable)
*	JSKL1-STG	1-Phase Earthing Device	25 – 70	5,7 – 16,0	1,5 – 2,1 (incl. cable)
*	JK238-DXF	1-Phase Earthing Device	25 – 50	5,7 – 11,5	1,1 (excl.cable)
E 16 595 50	DJS 1	Earthing Rod Screw			2,0
E 42 090 57	TAG 2020F2	Voltage Detector			0,3
E 16 529 43	MRS 24	Operating Pole			0,8
E 16 529 44	MRS 52	Operating Pole			1,0
	MRS-T 24	Operating Pole telescopic			1,1
E 16 590 49	DFO/JSKL1-J	Case			0,4
E 16 528 76	DFO 117	Case			1,0

*) When ordering, earthing cable area and length must be specified.